 HONDA INSTALLATION INSTRUCTIONS	Accessory	Application	Publications No.
	DOOR EDGE GUARDS	2000 CR-V	All 20636 Issue Date OCT 1999

PARTS LIST

Top right front door edge guard



Bottom right front door edge guard



Top left front door edge guard



Bottom left front door edge guard



Right rear door edge guard



Left rear door edge guard



Hem sealant cutting tool




TOOLS AND SUPPLIES REQUIRED

Rubber mallet
 Touch-up paint


INSTALLATION

1. Clean and wax the area to be covered with a high-quality paste wax.
2. Identify each door edge guard by holding it up to the door and matching its contour with the door edge.

3. Hold the guard against the inside edge of the door, and mark the sealant at the top and bottom of the ending points of the door edge guard.

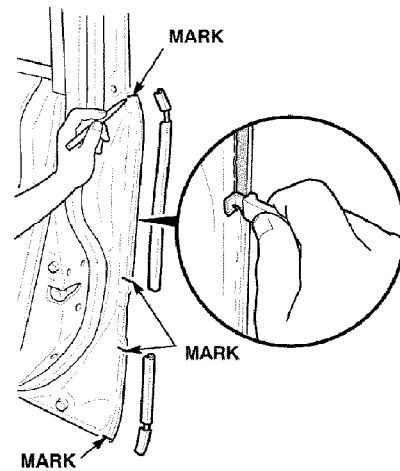

4. Position the hem sealant cutting tool against the door edge as shown, and trim the hem flange sealant from mark to mark.
5. Apply touch-up paint to the door, and let it dry.
6. Position the door edge guard on the door edge, and tap it into position with a series of light taps using a rubber mallet.

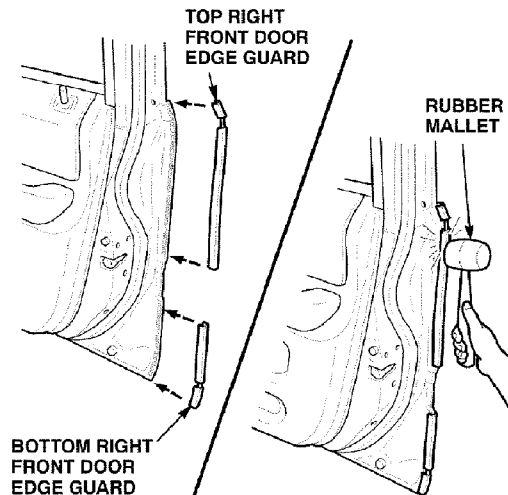

7. Repeat steps 2 through 6 to install the top and bottom door edge guards on the left (driver's side) front door.
8. Repeat steps 2 through 6 to install both the right and left rear door edge guards.

